

Ex de [op is] Green Linelaser


Ex de enclosure with 10mW
Green laser from Z-laser

EC-type Ex Certificate

DNV 12 ATEX 1638

Ex de [op is IIC] IIB T6 Gb

Assured by compliance with:
EN 60079-28:2007

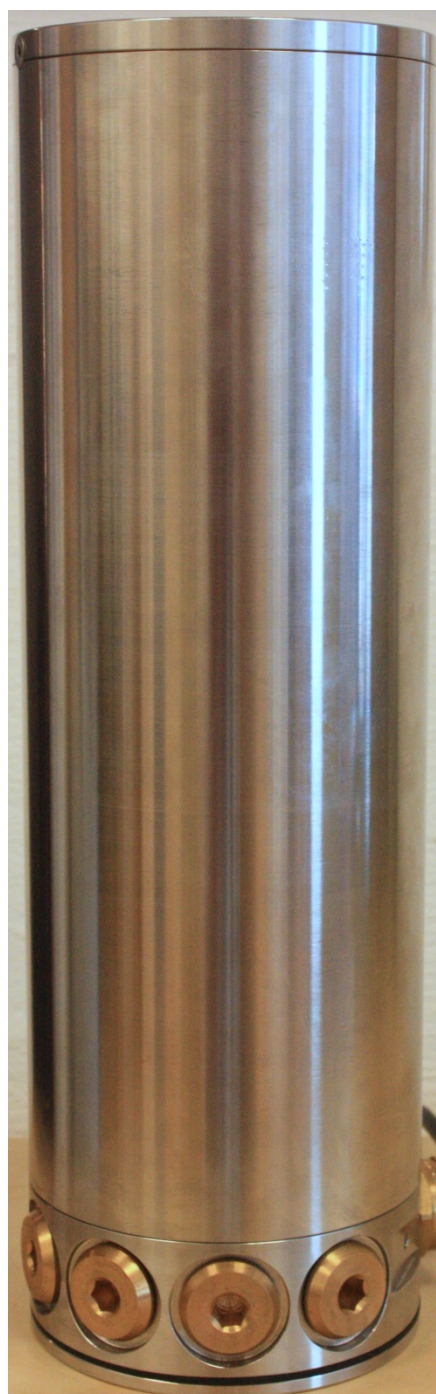


General Product information

Ex de enclosure with 10mW Green Line Laser

Type Identification: BB234.X

Electrical data: $V_i = 230\text{VAC}$ / $I_i = 0,5\text{A}$

Ex Code:  II 2 G Ex de [op is IIC] IIB T6 Gb

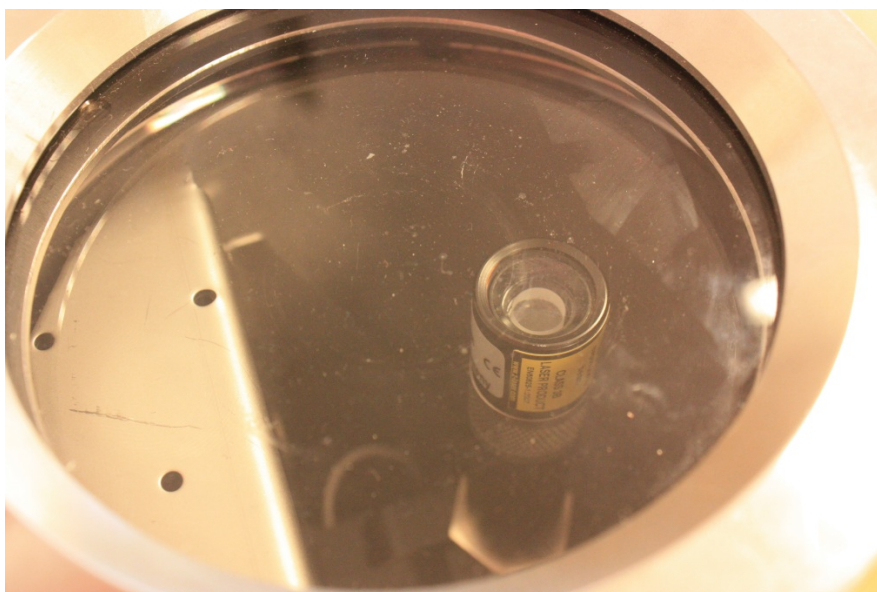

Enclosure: Ex de IIC TNXCD



Specifications:

Material Acid resistant stainless steel AISI 316L

IP Rating IP66

Temperature Various, max: -50°C to +60°C

Approvals:

- Atex, Empty enclosure DNV-2003-OSL-ATEX-0436-U

Standards EN/IEC: 60079-0, 60079-1, 60079-7

Ex-Code empty enclosure Ex de IIC, II 2 G

Entries Ex e glands M25